




DOWNLIGHT CUADRADO SUPERFICIE 18W

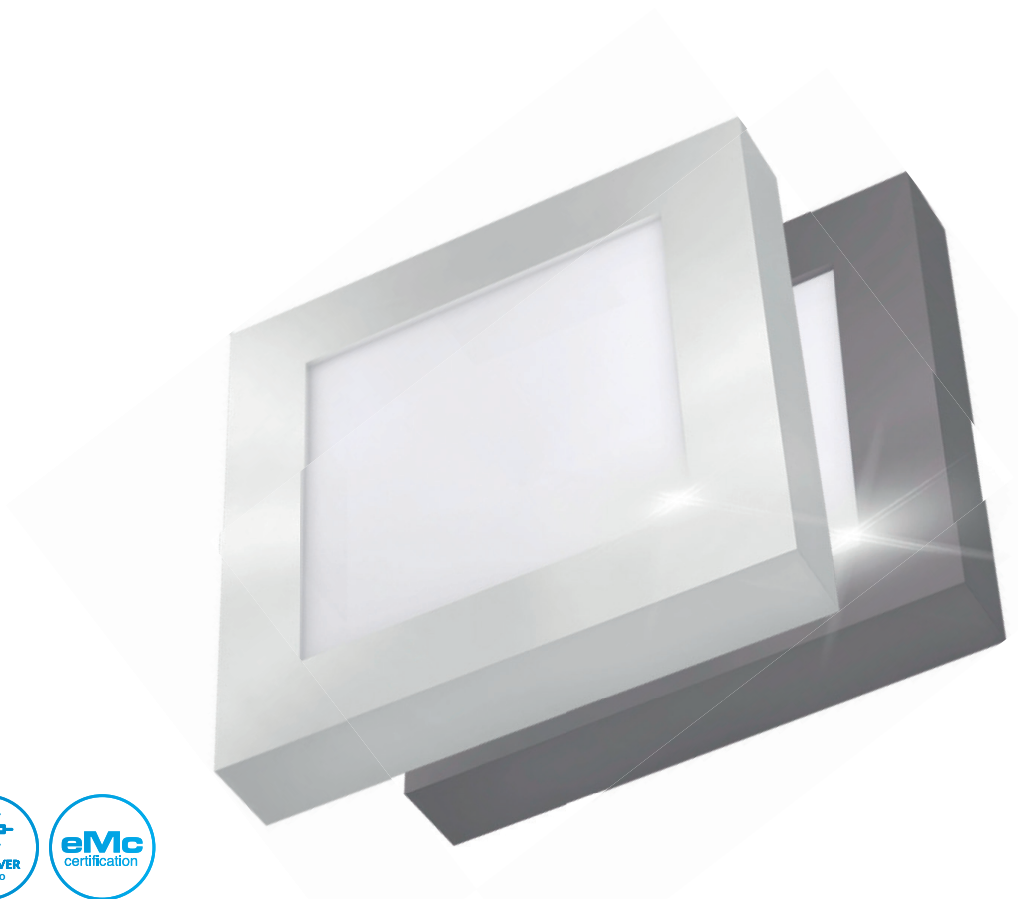

ref.DOW-155

18W
3200K
1450 lm
461 cd
120°
LED DRIVER
FP>0.90
IP40
AC 175-250V
50/60 Hz
SMD
ARO BLANCO

ref.DOW-044

18W
4200K
1450 lm
461 cd
120°
LED DRIVER
FP>0.90
IP40
AC 175-250V
50/60 Hz
SMD
ARO BLANCO

ref.DOW-045

18W
5000K
1450 lm
461 cd
120°
LED DRIVER
FP>0.90
IP40
AC 175-250V
50/60 Hz
SMD
ARO BLANCO

ref.DOW-187



18W
3200K
1450 lm
461 cd
120°
LED DRIVER
FP>0.90
IP40
AC 175-250V
50/60 Hz
SMD
ARO CROMO

ref.DOW-046

18W
4200K
1450 lm
461 cd
120°
LED DRIVER
FP>0.90
IP40
AC 175-250V
50/60 Hz
SMD
ARO CROMO

ref.DOW-047

18W
5000K
1450 lm
461 cd
120°
LED DRIVER
FP>0.90
IP40
AC 175-250V
50/60 Hz
SMD
ARO CROMO



INSTRUCCIONES SISTEMA DE MONTAJE DOWNLIGHT SUPERFICIE

